0 10 20 30 40 50 100 150 200 250 Mtr.

SCALE -1CM = 10M., RF 1 : 1000

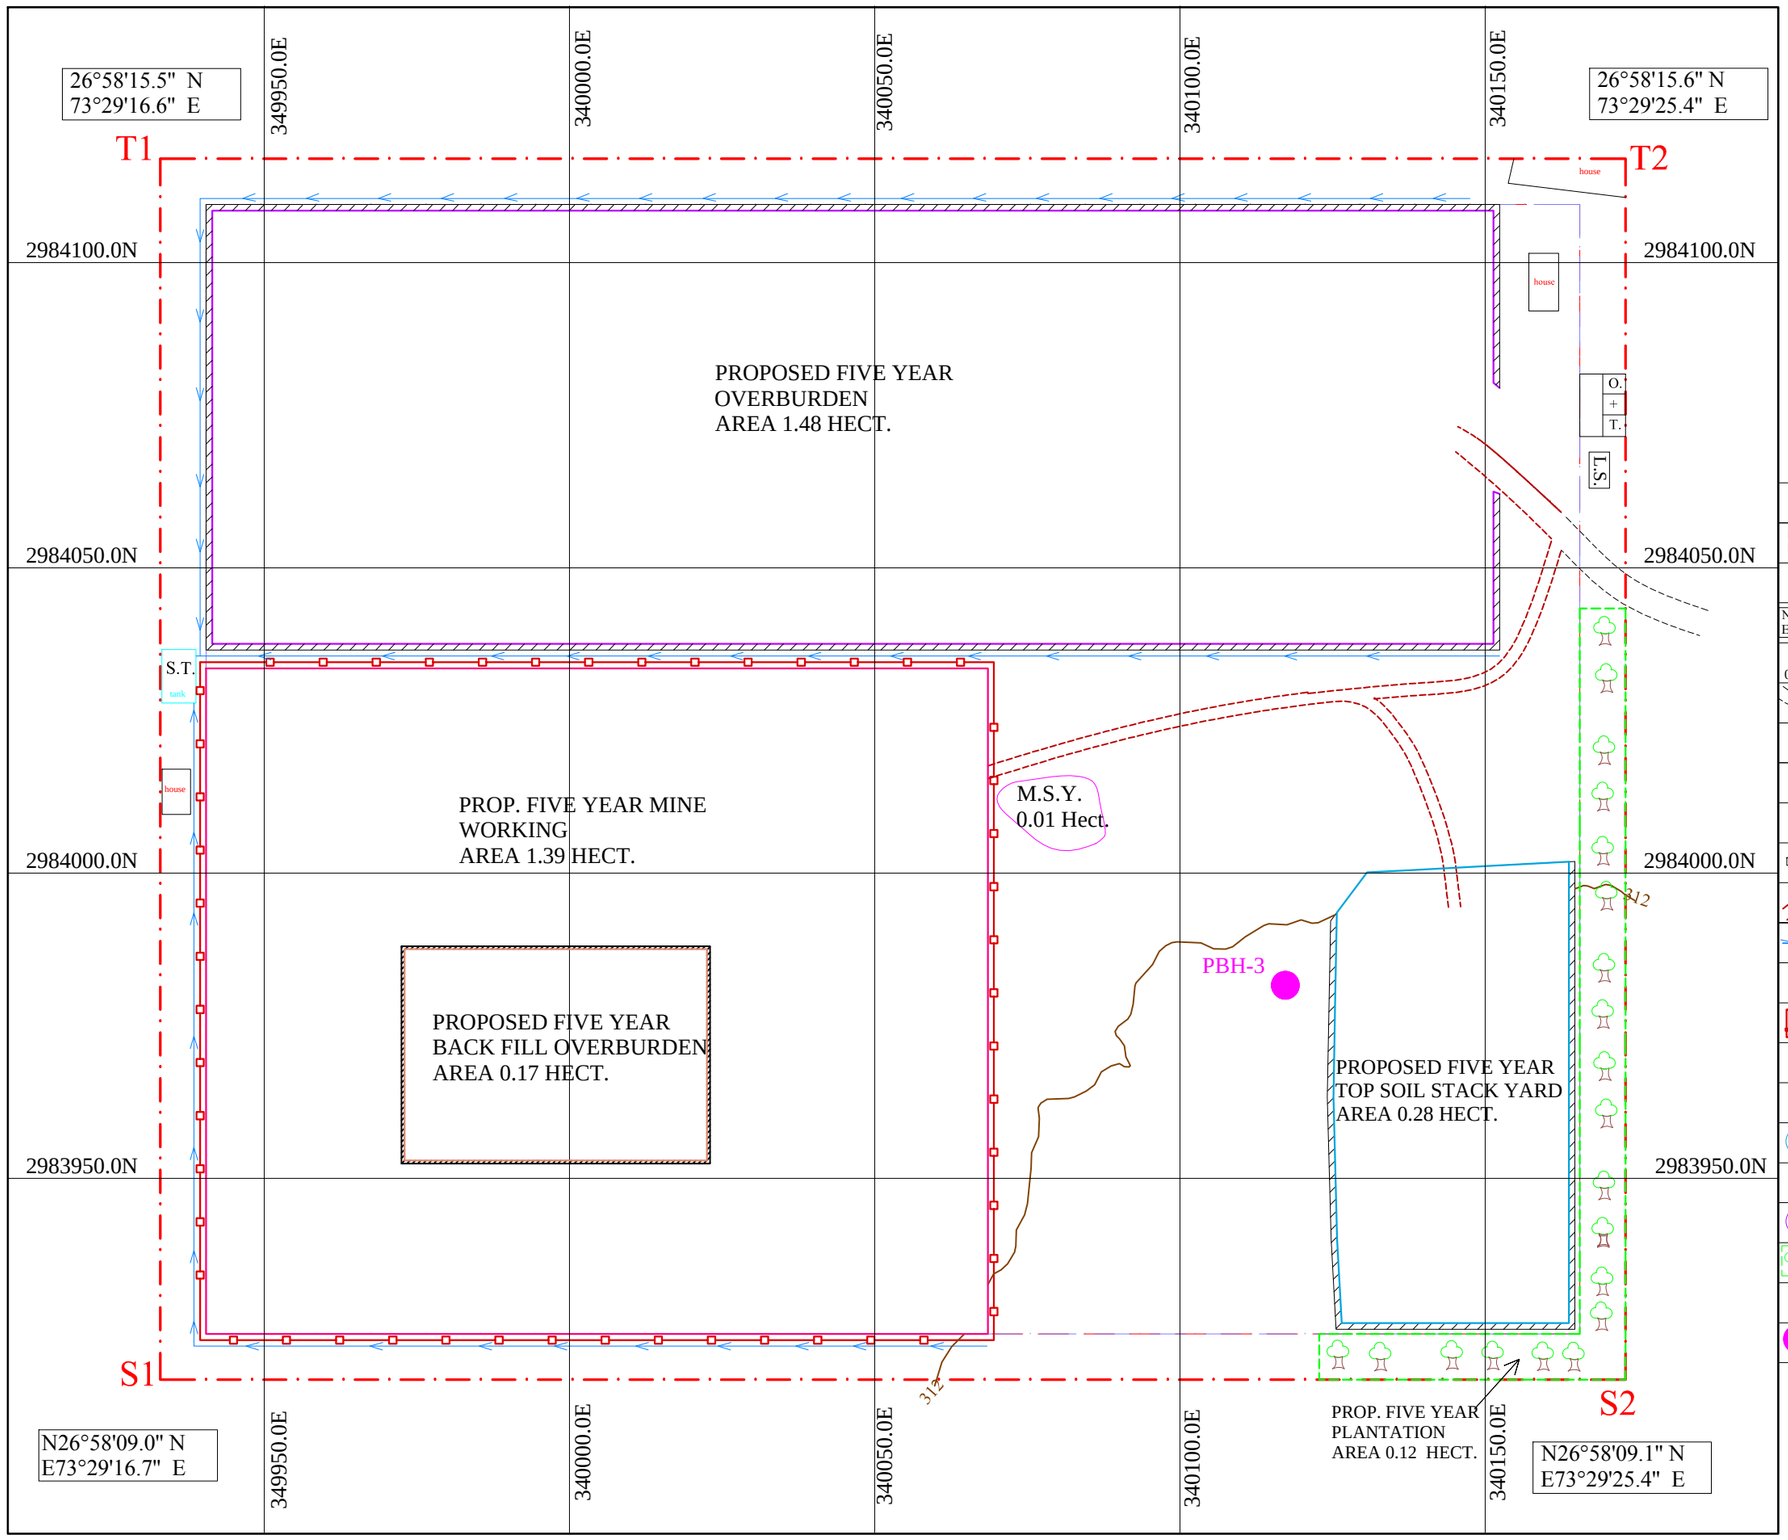

N

W E

S

DRONE SURVEY DATE
10 . 03 . 2025

INDEX

	BLOCK BOUNDARY
	7.5M. STATUTORY BARRIER
312	CONTOUR
N26°58'09.1" N E73°29'25.4" E	GEO-COORDINATES (S2 Pillar)
0E 0N 0N	GRID LINE (UTM WGS 84)
	ROAD / RASTA
	EXISTING INFRASTRUCTURE
	ULTIMATE PIT LIMIT
	PROP. MINERAL STACK YARD
	PROPOSED RETAINING WALL
	PROP. HAULAGE ROAD (1:16)
	PROP. GARLAND DRAIN
S.T.	PROPOSED SETTING TANK
	PROPOSED FENCING
O + T	PROPOSED OFFICE COMPLEX
L. S.	PROPOSED LABOUR SHED
	PROPOSED FIVE YEAR TOP SOIL STACK YARD
	PROP. FIVE YEAR MINE WORKING
	PROPOSED FIVE YEAR OVERBURDEN
	PROP. FIVE YEAR PLANTATION
	PROP. FIVE YEAR BACKFILL OVERBURDEN
PBH-3	PROPOSED BORE HOLE

FINANCIAL ASSURANCE

SL. NO.	Particular	Area put to use at Start of Year (ha) (A)*	Additional Requirement (ha) (B)*	**Total (ha) (C = A + B)**
1	Area under Mining	0	1.39	1.39
2	Topsoil stacking	0	0.28	0.28
3	Overburden/ Waste Dumping	0.00	1.48	1.48
3a	Screen Reject	0.00	0	0.00
4	Mineral Storage	0.00	0.01	0.01
6.	Infrastucture (Workshop , Building etc.)	0.01	0.01	0.02
6.	Road	0.04	0.06	0.10
7.	Railway	0	0	0
8	Tailing Pond	0	0	0
9	Effluent Treatment Plant	0	0	0
10	Mineral Separation Plant	0	0	0
11	Township Area	0	0	0
12	Others to Specify	0.00	0.00	0.00
Total		0.05	3.23	3.28
Grand Total(year 1 to 5)		0.05	3.23	3.28

FINANCIAL ASSURANCE AREA PLAN OF HARIPURA LIME STONE BLOCK TKSB-18 FOR AREA OF 4.800 HECT.

N\v - Haripura, Tehsil -Kheenvsar , Distt.- **Nagaur** (Raj.)
Mineral - Limestone
Applicant - M/s. Suncity Chemical & Minerals Private Limited
Area - 4.800 Hect. , Scale - 1 : 1000

PLATE NO.- 9

THIS IS CERTIFIED THAT THE PLAN IS PREPARED BASED ON THE BLOCK MAP AUTHENTICATED BY THE STATE GOVT. AND ARE CORRECT TO THE BEST OF MY KNOWLEDGE

Nimish Singhwi

Digitally signed by Nimish Singhwi
Date: 2025.05.31 17:53:39 -07'00'

QUALIFIED PERSON
MINING ENGINEER